


AD 710

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' \$z' D:

	"	kw	"	kw	Amp
400/230	710,00	568,00	640,00	512,00	923,80

fPQDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Z'5JF

TRANSFER SWITCH

AD 710

Doosan
Mecc Alte
D+' &'

Manufacturer	Doosan		
Model	DP180LB		
		612,00 kw [820,00HP]	
	L	18,273	
	"	128 x 142	
		15,0:1	
	fl # 7	"# "	1500
	fl 7	L	34,00
		L	112,20
AbsorbedAirDischargeReSourceKey.Text	' # "	36,00	
	' # "	700,00	
	' # "	118,00	
	° C	587,00	
		24 V d.c.	
	Load	%) \$i	+) i
	# ") \$i	
		136,40	103,80 71,20


		Mecc Alte
		ECO40 2L/4
	Hz	50
	"	680,00
7cg'		0,80
		3
	fl 7	400/230
	A	981,50

		fl 7		fl 7	
	"	"	"	"	L
AD 710	4000,00	3359,00	1550,00	2056,00	850,00
		fl 7		fl 7	
	"	"	"	"	L
MS 80	4940	4810	1606	2615	850

AD 710

Doosan
Mecc Alte
D+' &'

1 D+' &'

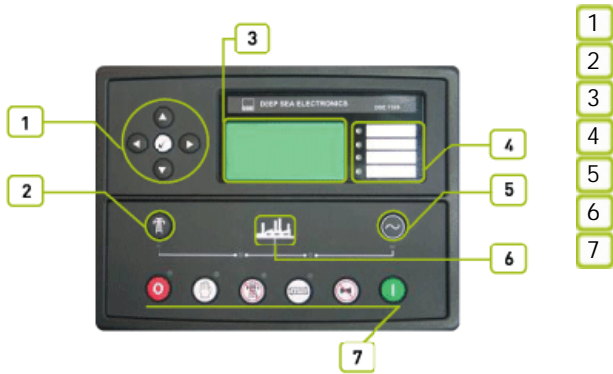

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž fI
&&\$ ž
"8G9+' &\$ ž
8G9+' &\$ ž
% &1 *(' ž
žFG' &žFG(,) ž

AD 710

Doosan
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž

ž

ž

AD 710

Doosan
Mecc Alte
D+ &



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850